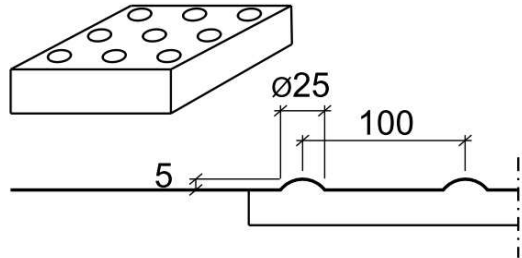
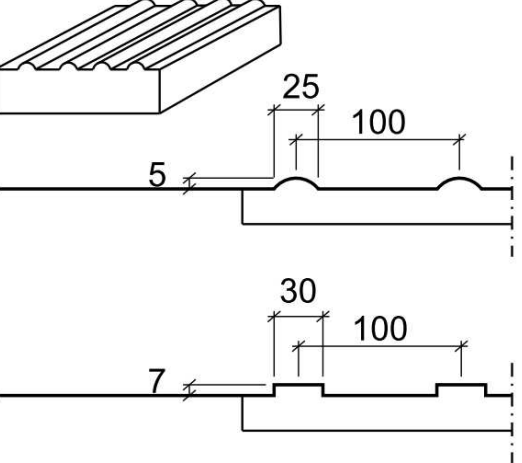


ITEM / CONSTRUCTION: **GUIDANCE PAVING FLAGS**

ACCESSIBILITY REQUIREMENTS	MEASUREMENTS	ITEMS REQUIRING SPECIAL PLANNING ATTENTION	PLANNING INSTRUCTIONS	COLOURS AND LIGHTING	MAINTENANCE REQUIREMENTS
<p>1 SPECIAL LEVEL OF ACCESSIBILITY</p> <p>Pedestrian street milieus</p> <p>City centre areas with public facilities and services</p> <p>Areas surrounding institutions providing health care and services for the elderly and persons with a disability</p> <p>Areas with a lot of housing targeted at the elderly and persons with a disability</p> <p>Public transport terminals and areas surrounding public bus stops</p> <p>Special sports areas and playgrounds</p> <p>Accessible routes in recreational areas, etc.</p>	<p>BLISTER PAVING FLAG: cupola pattern</p>  <p>Width in direction of travel 1,200 mm, when going to staircase or ramp leading directly down; otherwise 600 mm</p> <p>DIRECTIONAL GUIDANCE PAVING FLAG: half-rod and bar patterns</p>  <p>Half-rod and bar patterns installed in direction of travel</p>	<p>Kerbstone</p> <p>Outside staircases</p> <p>Ramps</p> <p>Loading islands</p> <p>Walking surfaces</p> <p>Railings (guide railings)</p>	<p>Guidance paving flags positioned to lead logically to destination</p> <p>To avoid misunderstanding, no other paving materials resembling these in colouring, surface pattern or texture are to be used nearby</p> <p>Ice and snow melting system or roof recommended</p> <p>Always consult experts at the Finnish Federation of the Visually Impaired or at Finlands Svenska Synskadade</p>	<p>Colour/contrast distinct from surface (contrast requirement: difference between medium grey and black/white), primarily light colouring</p> <p>Good lighting; glare-free, even. Recommended lighting intensity 20 lux ("Unobstructed lighting and clear contrasts in station areas", "ELSA", Ministry of Transport and Communications' Research and Development Programme for Accessibility)</p> <p>Light possibly integrated in guidance/warning pattern</p>	<p>Guidance and warning pattern to remain distinct</p> <p>Colour contrast to remain distinct</p>
<p>2 BASIC LEVEL OF ACCESSIBILITY</p>					